




light

# flexi light - flexi frames

## Modular frames for Split Systems

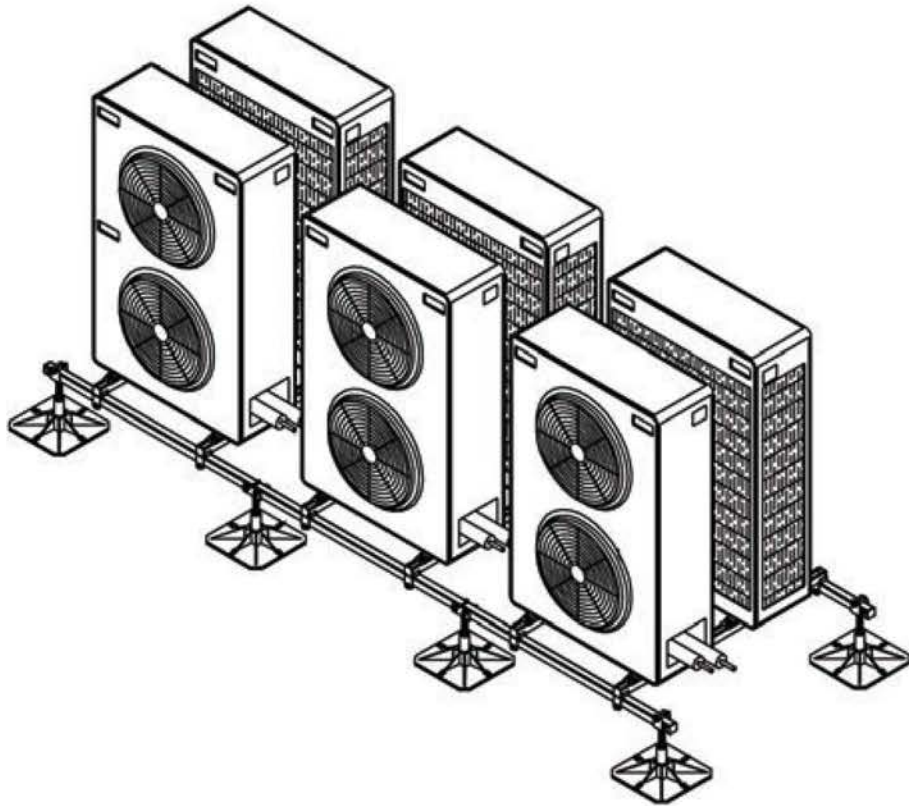

### Features & Benefits

- Non-penetrative support
- Flexible design to accommodate late design changes
- Fast and simple installation
- Hot dip galvanised frameworks
- No time consuming clamping kits required, cross bars are industry standard strut fix
- Full AutoCAD drawing support
- Load management and wind calculations available
- Full on-site support and surveying services
- Available as standard 320mm square foot or 500mm option for heavy duty applications



320mm square foot




Pump House  
 Glaisdale Drive East  
 Nottingham  
 NG8 4LY  
 Tel: +44(0)115 900 5858  
 www.flexisupportsystems.co.uk  
 sales@flexisupportsystems.co.uk



everyday



heavy



access



solar





Flexi

# flexi modular frames for a/c splits



These versatile free standing frameworks are supplied boxed and come with fully adjustable leg assemblies with 320mm square black polypropylene feet as standard\*, incorporating anti-vibration rubber mats adhered to the underside. Robust 40 x 40mm standard box end bars are 3mm thick and leg assemblies can slide to many positions. Industry standard strut cross bars negate the requirements of time consuming clamping kits as sprung washers and associated M10 fixings are supplied with all frameworks. For heavier services please visit our 'flexi - heavy' range.

\* 500mm square foot option for heavy duty applications



## Typical a/c split condenser layout



Part Code - PH-BF-B

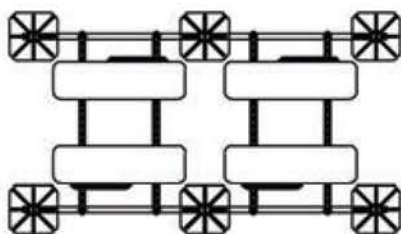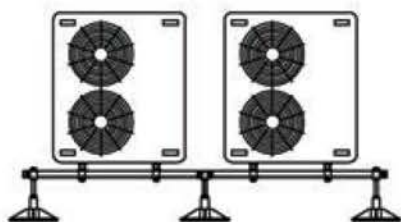

Part Codes - PH-BF-B + PH-EF-B

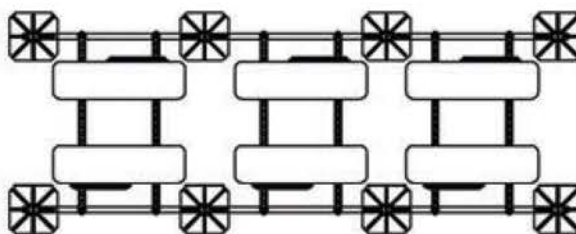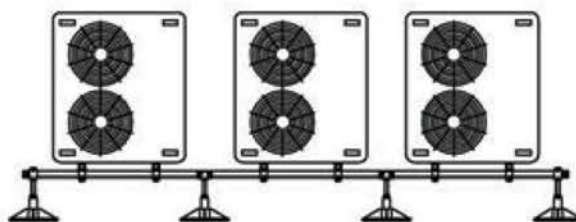

Part Codes - PH-BF-B + 2 x PH-EF-B

Part Code	Description	Length	Width	Height	Weight	Max Load
PH-BF-B	Flexi - BASE FRAME (1200mm)	1200 mm	1200 mm	300-405 mm	30 kg	500 kg
PH-EF-B	Flexi - EXTENDER FRAME (1200mm)	1200 mm	1200 mm	300-405 mm	24 kg	500 kg

The system can accommodate any number of AC splits simply by adding additional PH-EF-B (EXTENDER FRAMES)



Flexi

## Specification Extract

External a/c services will be supported on Pump House fully adjustable and hot dip galvanised flexi frames. Contact Pump House Tel: +44(0)115 900 5858.

## Application

Suitable for a/c split condensers. Cross bars slide to accommodate a/c fixing feet centres and negate the requirement of time consuming clamping kits (as seen with some systems), as industry standard sprung nuts and strut cross bars provide a very fast install.

## Material Specification

- Foot - 320mm square as standard or 500mm square for heavy duty applications UV stabilised 90% polypropylene, 10% grp
- Mat - 100% natural rubber, (mat is adhered to the foot)
- Legs - 48mm dia. 3mm steel tube with M24 stud adjuster and 3mm thick U-clevis to top
- End bars - 40x40x3mm SHS (square hollow section)
- Cross bars - 41x41x2.5mm slotted stud with adjustable end clamps
- Finish - Hot dip galvanised steelwork BS EN 10219:1997. Galvanising: BS EN ISO 1461:1999. Salt mist testing: BS EN 60068-2-52

## Our service offers you

- Quotations on request
- Full AutoCAD drawings support
- Site support and site surveys
- Load management calculations
- Over 20 years experience in flat roof design and providing support systems to building services
- Fast delivery (FREE on large orders)
- Experienced in-house technical staff